

Potenza con tubi puliti **Attacchi lati opposti AFN**
 Capacity with clean tubes **Connections opposite sides AFN**



(Optional)


159 - 1867 kW

Modello	Type	EHLDF (2,1 mm)	1226F	1227F	1236B	1237B	1246B	1247E	1256A	1266A	1267A	1276A	1277A	1286N	1287N	1296N	1297N				
Potenza	Capacity	<input type="checkbox"/> Glycol 34% ΔT 15 K	359	294	395	310	544	445	599	469	738	603	810	634	894	732	985	773			
Portata	Flow rate	Fuido refrigerante	m³/h	67,2	55,0	74,0	58,0	101,7	83,2	111,9	87,7	138,0	112,7	151,5	118,5	167,1	136,9	184,3	144,6		
Perdita di carico	Pressure drop	Refrigerant fluid	kPa	40	28	31	20	46	32	41	26	98	67	59	38	28	19	25	16	45	
Portata d'aria	Air quantity		m³/h	120400	88800	114400	82800	180600	133200	171600	124200	240800	177600	228800	165600	301000	222000	286000	207000	361200	266400
Assorbimento	Motor power consumption	6P Ø 900	W	13000	8000	13000	8000	19500	12000	16000	12000	26000	16000	26000	16000	32500	20000	32500	20000	39000	24000
			A	24,0	14,0	24,0	14,0	36,0	21,0	36,0	21,0	48,0	28,0	48,0	28,0	60,0	35,0	60,0	35,0	72,0	42,0
Livello pressione sonora	Sound pressure level		dB(A)	63	56	63	56	65	58	65	58	66	59	66	59	67	60	67	60	67	60

DATI COMUNI / COMMON DATA																				
Elettroventilatori	Fans	n°	4	00	00	6	000	000	6	000	000	8	0000	0000	10	00000	00000	10	00000	00000
Collegamento	Connection		Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y
Volume circuito	Circuit volume	dm³	2 x 91	2 x 109	2 x 118	2 x 118	2 x 145	2 x 144	2 x 181	2 x 171	2 x 216	2 x 198	2 x 252	2 x 225	2 x 287	2 x 251	2 x 323	2 x 278	2 x 359	
Dimensioni	Dimensions	A	2844	2844	4266	4266	5688	5688	7110	7110	8532	8532	9954	9954	11376	11376	11376	12798	12798	

Modello	Type	EHLDU (2,1 mm)	7225C	7226D	7235F	7236C	7245B	7246F	7255E	7256B	7265A	7266B	7275A	7276E	7285A	7286A	7295N	7296A
Potenza	Capacity	<input type="checkbox"/> Glycol 34% ΔT 15 K	159	134	167	136	242	204	259	203	321	271	345	271	404	341	432	338
Portata	Flow rate	Fuido refrigerante	m³/h	29,7	25,1	31,2	25,3	45,2	38,2	48,4	38	60	50,6	64,6	50,7	75,6	63,9	80,8
Perdita di carico	Pressure drop	Refrigerant fluid	kPa	50	37	66	45	59	44	70	46	51	37	63	42	69	51	43
Portata d'aria	Air quantity		m³/h	44000	34400	40800	32400	66000	51600	61200	48600	88000	68800	81600	64800	110000	86000	102000
Assorbimento	Motor power consumption	12P Ø 900	W	1080	680	1080	680	1620	1020	1200	1020	2160	1360	2160	1360	2700	1700	2700
			A	3,2	1,6	3,2	1,6	4,8	2,4	4,8	2,4	6,4	3,2	6,4	3,2	8	4	8
Livello pressione sonora	Sound pressure level		dB(A)	37	31	37	31	39	33	39	33	40	34	40	34	41	35	41

DATI COMUNI / COMMON DATA																				
Elettroventilatori	Fans	n°	4	00	00	6	000	000	6	000	000	8	0000	0000	10	00000	00000	10	00000	00000
Collegamento	Connection		Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y
Volume circuito	Circuit volume	dm³	2 x 54	2 x 72	2 x 91	2 x 118	2 x 108	2 x 144	2 x 126	2 x 171	2 x 144	2 x 198	2 x 162	2 x 225	2 x 180	2 x 251	2 x 197	2 x 278		
Dimensioni	Dimensions	A	2844	2844	4266	4266	5688	5688	7110	7110	8532	8532	9954	9954	11376	11376	12798	12798		

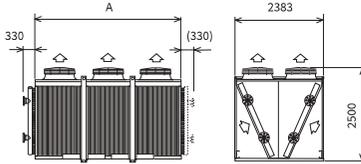

VARIANTI COSTRUTTIVE
CONSTRUCTION VARIANTS

